




### Product Size

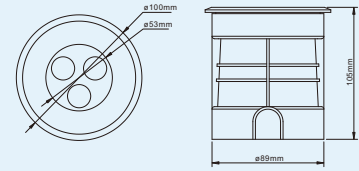

### Specification

<b>Model No.:</b>	RS-UG3W-T(88261)
<b>Front cover &amp; Housing:</b>	304 Stainless steel+Aluminum body+Plastic installation box
<b>Dimensions:</b>	D100*H105mm
<b>Tempered Glass:</b>	8mm thickness
<b>LED chip:</b>	Epistar
<b>LED Q'ty:</b>	3pcs 1W LED
<b>Cable gland:</b>	Nickel plated brass PG9
<b>Driver:</b>	Constant current driver
<b>Lens:</b>	Clear, Bead, Frosted
<b>Beam Angle Options:</b>	10° 30° 45° 60° 90°
<b>Power Cable:</b>	2*1.0mm <sup>2</sup> / 3*0.75mm <sup>2</sup> / 4*0.75mm <sup>2</sup> VDE rubber cable
<b>Protection Class:</b>	IP67
<b>Environment:</b>	Dry
<b>Mounting Hardware:</b>	Embedded System
<b>Net Weight:</b>	1kgs with 1m cable
<b>Lifetime:</b>	>50000H

### Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88261.031.01	2700-3000K	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-27	3	270
88261.031.02	4000-4500K	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-27	3	285
88261.031.03	5000-5500K	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-27	3	300
88261.031.04	6000-6500K	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-27	3	300
88261.031.05	Red	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-27	3	75
88261.031.06	Green	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-27	3	180
88261.031.07	Blue	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-27	3	90
88261.031.08	Yellow	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-27	3	210
88261.031.12	RGBV+ (build-in CC driver)	3*1	R/G/B/V+	DC12	R: 83 G: 83 B: 83	R: 1 G: 1 B: 1	R: 25 G: 60 B: 30

