

深圳市瑞色光电有限公司

RISE OPTOELECTRONICS CO.,LTD.

地址:广东省深圳市龙岗区布吉甘李六路科伦特科技园4A栋4楼
4F,Building 4A,Kelunte Ind.Park, Ganli 6th Rd.,Buji,
518112 Shenzhen,China

电话(Tel):+86-755-28225099

传真(Fax):+86-755-28225199

E-mail:rise@riselighting.com

http://www.riseled.com



RISE
瑞色光电



OUTDOOR LIGHTING

2019

中国·深圳

Shenzhen.China

<http://www.riseled.com>

卖一盏好灯 做一件善事

One Lamp one charity

公司简介 / COMPANY PROFILE

深圳市瑞色光电有限公司成立于2010年，是一家专业于LED户外景观照明灯具的开发、生产和销售的大型高新技术企业。公司面积3,000平方米，采用一流的国际标准LED灯具生产和测试工艺。拥有照明行业一流的研发设计人员和技术精湛的专业队伍，凭借在产品结构设计、软件设计、电路设计、光学处理、散热设计、专业的亮化工程解决方案等众多优势，稳步成为国内和国际户外景观照明行业的引领者。

公司自成立以来，始终专注于户外LED景观、建筑灯具，产品有水底灯（含喷泉灯和泳池灯）、地理灯、洗墙灯、投光灯、地砖灯等系列的高端产品。所有产品均通过严格全面的标准测试，包括安全性、防水性、电参数、光参数等等，确保满足客户的需求并适应不同的户外环境。公司拥有多项外观设计专利和实用新型专利证书，大部分产品都拥有CE、RoHS、IP、SGS、UL等证书，公司还通过ISO9001:2015认证。

持续创新、为客户提供全方位的LED户外景观照明产品和配套设计服务，是我们永不妥协的选择，同时也为海内外客户提供OEM/ODM服务，真诚与广大客户携手共创绿色未来。

Rise Optoelectronics Co.,Ltd (Rise Optoelectronics (HK) Limited) found In 2010. It is high-tech enterprises that focus on design, produce and sales of LED outdoor landscape light.

Rise company area is 3,000 square meters, we always insist on using the first-class international standard for LED lighting production and testing processes. Rise has one the top of professional team for R & D design and skill, who has many advantages of the product design, software design, circuit design, optical processing, thermal design and others professional led lighting solutions.

With developed for several years. Rise become one of the leader of LED Outdoor Landscape light industry.

Rise is professional manufacturer of led outdoor light, Product range is: LED underwater light(Fountain light/pool light), Led underground light, led wall washer light, led flood light and led dance brick light. For meeting different projects' request in different installation environment, all lights passed standard testing, Including security data, water resistance, electrical parameters, optical parameters, ect. Most of led lights got certificates CE, RoHS, IP Rate, SGS and UL. Besides, Rise company also passed ISO9001:2015.

Best products, service and creative solution we supply! Rise undertakes OEM/ODM service for customers. We hope to establish a close cooperation with you to build our colorful world.



LED LIGHTING

RISE



LED LIGHTING

RISE

目录 DIRECTORY



1-9
LED水底灯系列
LED Underwater Light



10-11
LED嵌入式水底灯
LED Recessed Pool Light



12-17
LED地埋灯系列
LED Inground Light



18-21
LED洗墙灯
LED Wall Washer Light



22-26
LED射灯
LED Landscape Spot Light



27-29
配件
Accessories



LED水底灯
LED Underwater light


Application:

Apply for large swimming pool, pond, square, Park fountain or Hotel fountain.



Model No.: RS-UW3W316X (88139)

Size: $\phi 52 \times H79.5\text{mm}$
Input Vol.: AC/DC12V
Power: 1*3W
Color: Single color / RGB
Material: 316L stainless steel
IP grade: IP68




NEW




Model No.: RS-UW9W316X (88101)

Size: $\phi 93 \times H145\text{mm}$ (max.)
Input Vol.: AC/DC12-24V
Power: 3*3W
Color: Single color
Material: 316L stainless steel
IP grade: IP68

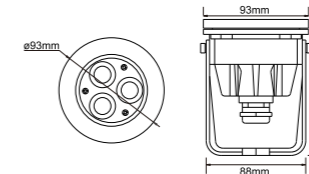

**Model No.: RS-UW9W316X-A (88131)
RS-UW12W316X-A (88131)**


Size: $\phi 81 \times H158\text{mm}$ (max.)
Input Vol.: AC/DC12V, DC24V
Power: 3*3W/3*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

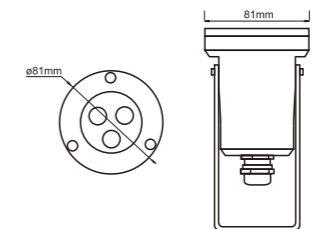




Model No.: RS-UW18W316X (88105)
RS-UW18W316X (88105)

Size: $\phi 123 \times H165$ mm (max.)
Input Vol.: AC/DC12V,DC24V
Power: 6*3W/6*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

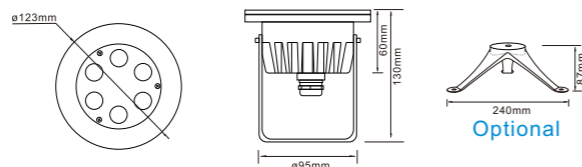


Model No.: RS-UW27W316X-A (88106)
RS-UW32W316X-A (88106)

Size: $\phi 150 \times H185$ mm (max.)
Input Vol.: AC/DC12-24V
Power: 9*3W/8*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

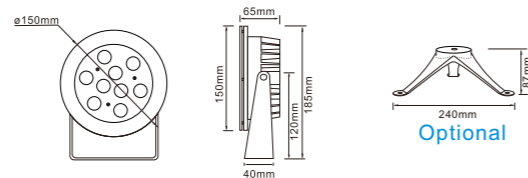


Model No.: RS-UW36W316X (88107)
RS-UW48W316X (88107)

Size: $\phi 175 \times H230$ mm (max.)
Input Vol.: AC/DC24V
Power: 12*3W/12*4W
Color: Single color / RGB
Material: 316L stainless steel
IP grade: IP68

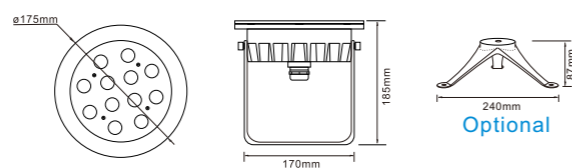


Model No.: RS-UW45W316X (88107)

Size: $\phi 175 \times H230$ mm (max.)
Input Vol.: AC/DC24V
Power: 15*3W
Color: Single color / RGB
Material: 316L stainless steel
IP grade: IP68

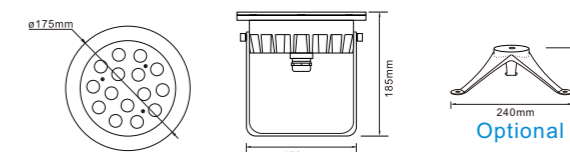



Model No.: RS-UW48W316X (88107)
RS-UW64W316X (88107)

Size: $\phi 175 \times H230$ mm (max.)
Input Vol.: AC/DC24V
Power: 16*3W (RGB 3in1)
16*4W (RGBW 4in1)
Color: RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

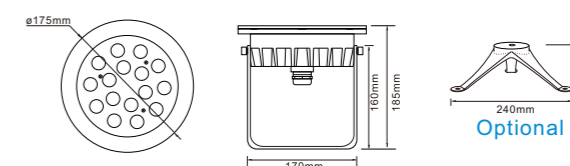

Model No.: RS-UW54W316X (88108)
RS-UW72W316X (88108)


Size: $\phi 190 \times H250$ mm (max.)
Input Vol.: AC/DC24V
Power: 18*3W/18*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

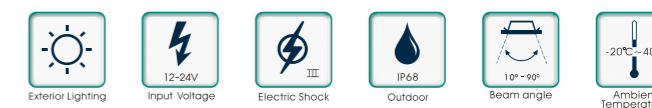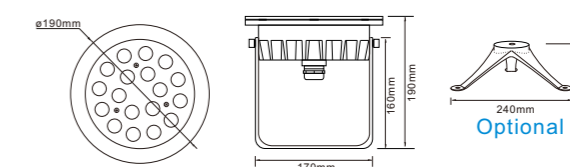




Model No.: RS-UW72W316X (88108)
RS-UW96W316X (88108)

Size: $\phi 190 \times H250$ mm (max.)
Input Vol.: AC/DC24V
Power: 24*3W (RGB 3in1)
24*4W (RGBW 4in1)
Color: RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

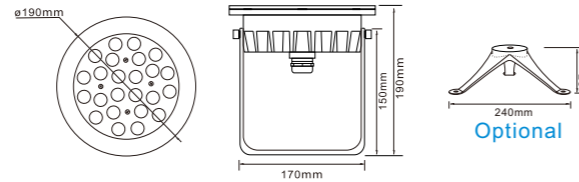



Model No.: RS-FT27W316X (88103)
RS-FT24W316X (88103)

Size: $\phi 160 \times H36$ mm
Nozzle hole size: $\phi 47$ mm
Input Vol.: AC/DC12-24V
Power: 9*3W/6*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

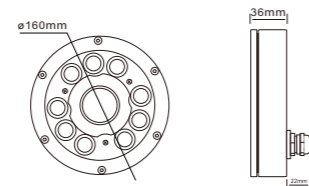

Model No.: RS-FT36W316X (88104)
RS-FT40W316X (88104)


Size: $\phi 180 \times H36$ mm
Nozzle hole size: $\phi 47$ mm
Input Vol.: AC/DC12-24V
Power: 12*3W/10*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

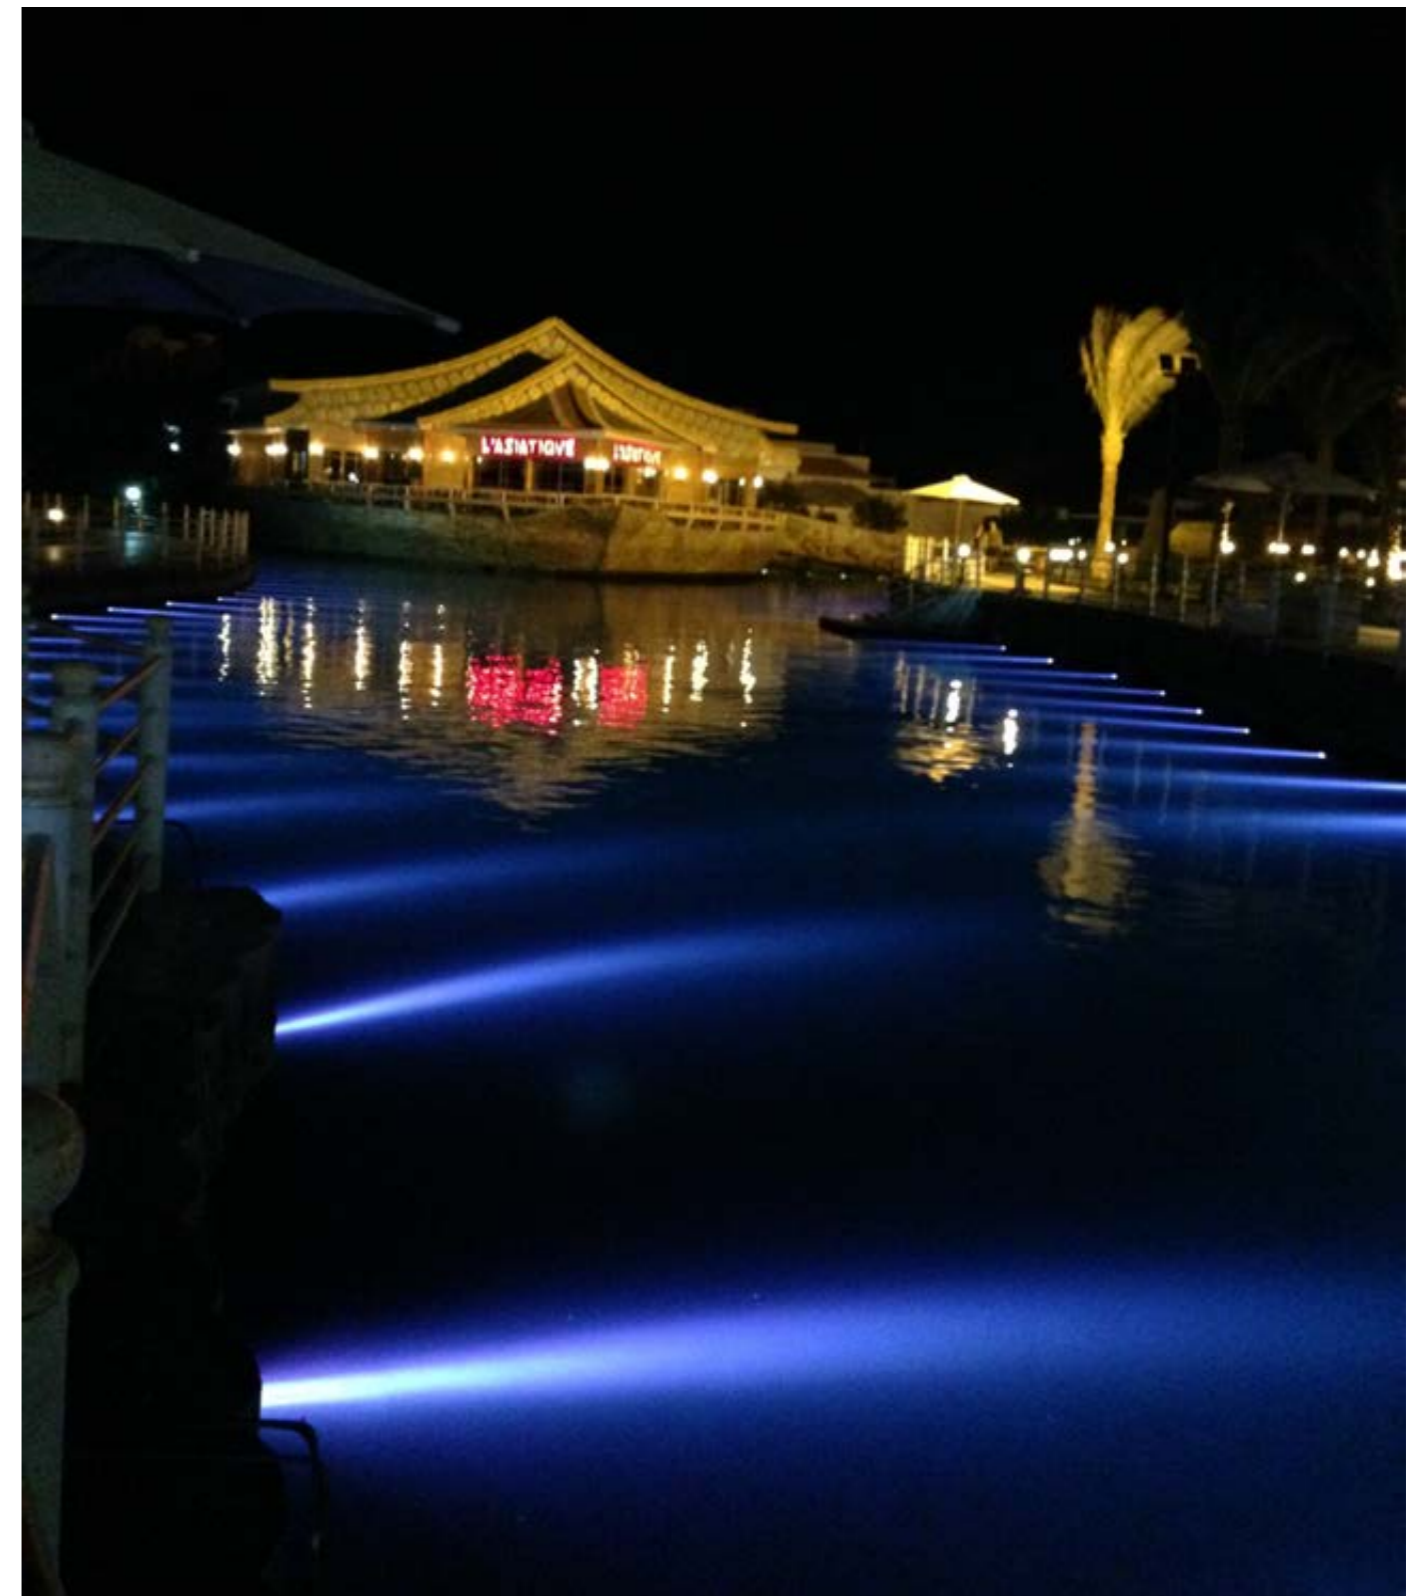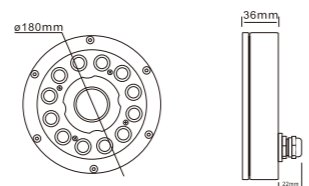




**Model No.: RS-FT27W316X-A (88133)
RS-FT36W316X-A (88133)**

Size: $\phi 250 \times H59$ mm
Nozzle hole size: $\phi 47$ mm
Input Vol.: AC/DC12-24V
Power: 9*3W/12*3W
9*4W/12*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

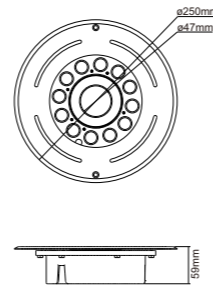


**Model No.: RS-FT54W316X (88132)
RS-FT72W316X (88132)**

Size: $\phi 290 \times H48$ mm
Nozzle hole size: $\phi 65$ mm
Input Vol.: AC/DC24V
Power: 18*3W/24*3W
18*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

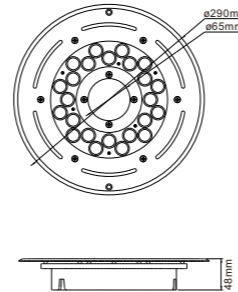


**Model No.: RS-FT27W316X-B (88135)
RS-FT36W316X-B (88135)
RS-FT48W316X-B (88135)**

Size: $\phi 184 \times H59$ mm
Nozzle hole size: $\phi 47$ mm
Input Vol.: AC/DC12-24V
Power: 9*3W/12*3W
9*4W/12*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

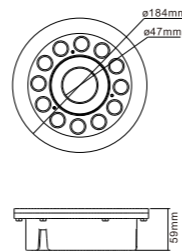


**Model No.: RS-FT54W316X-A (88134)
RS-FT72W316X-A (88134)**

Size: $\phi 222 \times H48$ mm
Nozzle hole size: $\phi 65$ mm
Input Vol.: AC/DC24V
Power: 18*3W/24*3W
18*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

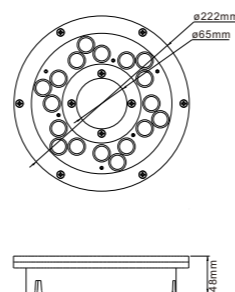


Model No.: RS-UW27W316X-B (88136)

Size: $\phi 103.5 \times H166$ mm(max.)
Input Vol.: AC/DC12-24V
Power: 9*3W
Color: Single color / RGB
Material: 316L stainless steel
IP grade: IP68

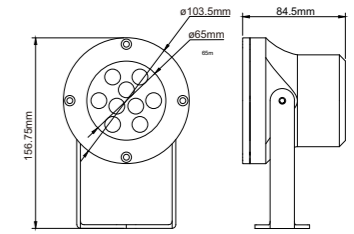


Model No.: RS-UW54W316X-A (88137)

Size: $\phi 149 \times H187$ mm(max.)
Input Vol.: AC/DC24V
Power: 18*3W
Color: Single color / RGB
Material: 316L stainless steel
IP grade: IP68

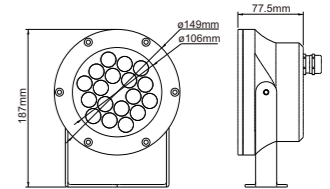


**Model No.: RS-UW27W316X-L (88138)
RS-UW36W316X-L (88138)**

Size: L270*W95*H125mm
Input Vol.: AC/DC12-24V
Power: 9*3W/9*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel
IP grade: IP68

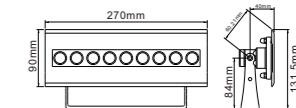

Model No.: RS-RP27W316X-FT (88129)


Size: $\phi 200 \times H33$ mm (H95mm include embedded part)
Nozzle hole size: $\phi 47$ mm (G1 1/2")
Input Vol.: AC/DC12V, DC24V
Power: 9*3W
Color: Single color / RGB
Material: 316L stainless steel
IP grade: IP68

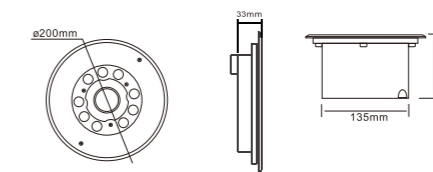

**Model No.: RS-PAR56-15W (88127)
RS-PAR56-36W (88127)**




Size: $\phi 290 \times H62$ mm
Input Vol.: AC/DC12V
LED Source: 75pcs SMD5050/12*3W
Color: Single color / RGB
Material: ABS + PC cover
IP grade: IP68

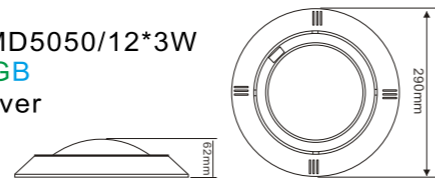

**Model No.: RS-PAR56-20W (88126)
RS-PAR56-54W (88126)**




Size: $\phi 295 \times H62$ mm
Input Vol.: AC/DC12V
LED Source: 105pcs SMD5050/18*3W
Color: Single color / RGB
Material: 304 stainless steel+PC cover
IP grade: IP68

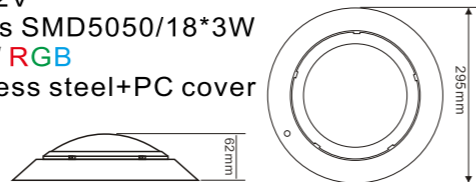


Model No.: RS-BL54W316X (88148)

Size: $\phi 120 \times H26$ mm
Input Vol.: AC/DC24V
LED Source: 18*3W
Color: Single color / RGB
Material: 316L Stainless steel
Control way: External driver
IP grade: IP68



Model No.: RS-BL108W316X (88149)

Size: W208*D120*H26mm
Input Vol.: AC/DC24V
LED Source: 36*3W
Color: Single color / RGB
Material: 316L Stainless steel
Control way: External driver
IP grade: IP68

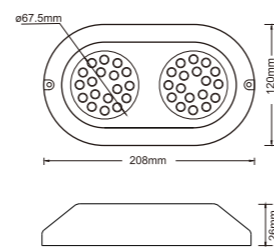


**LED 嵌入式水底灯
LED Recessed
pool light**



**Model No.: RS-RP9W316X (88250)
RS-RP12W316X (88250)**

Size: $\phi 113.5 \times H170$ mm
Input Vol.: AC/DC12V,DC24V
Power: 3*3W/3*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel lamp body
+304ss sleeve



IP grade: IP68

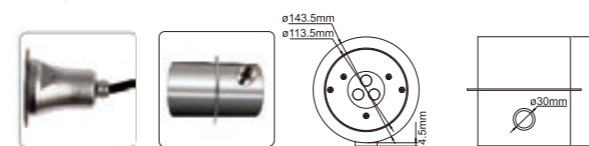

**Model No.: RS-RP18W316X (88251)
RS-RP24W316X (88251)**


Size: $\phi 128 \times H150$ mm
Input Vol.: AC/DC12V,DC24V
Power: 6*3W/6*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel lamp body
+304ss sleeve

IP grade: IP68

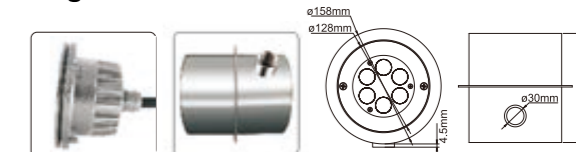






Model No.: RS-RP27W316X (88252)
RS-RP32W316X (88252)
Size: $\phi 153.5 \times H150\text{mm}$
Input Vol.: AC/DC12-24V
Power: 9*3W/8*4W
Color: Single color / RGB / RGBW
Material: 316L stainless steel lamp body+304ss sleeve
IP grade: IP68

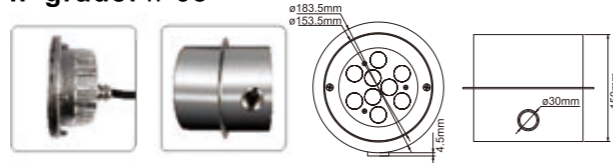

Model No.: RS-RP36W316X (88254)
RS-RP45W316X (88254)
RS-RP64W316X (88254)
Size: $\phi 180 \times H150\text{mm}$
Input Vol.: AC/DC24V
Power: 12*3W/15*3W
16*4W(RGBW 4in1)
Color: Single color / RGB / RGBW
Material: 316L stainless steel lamp body+304ss sleeve
IP grade: IP68

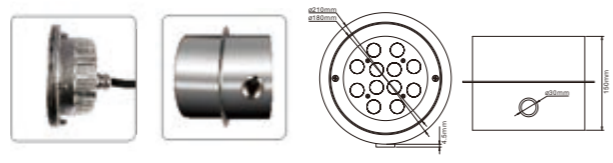

Model No.: RS-RP54W316X (88255)
RS-RP72W316X (88255)
RS-RP96W316X (88255)
Size: $\phi 195 \times H150\text{mm}$
Input Vol.: AC/DC24V
Power: 18*3W
24*3W(RGB 3in1)
24*4W(RGBW 4in1)
Color: Single color / RGB / RGBW
Material: 316L stainless steel lamp body+304ss sleeve
IP grade: IP68

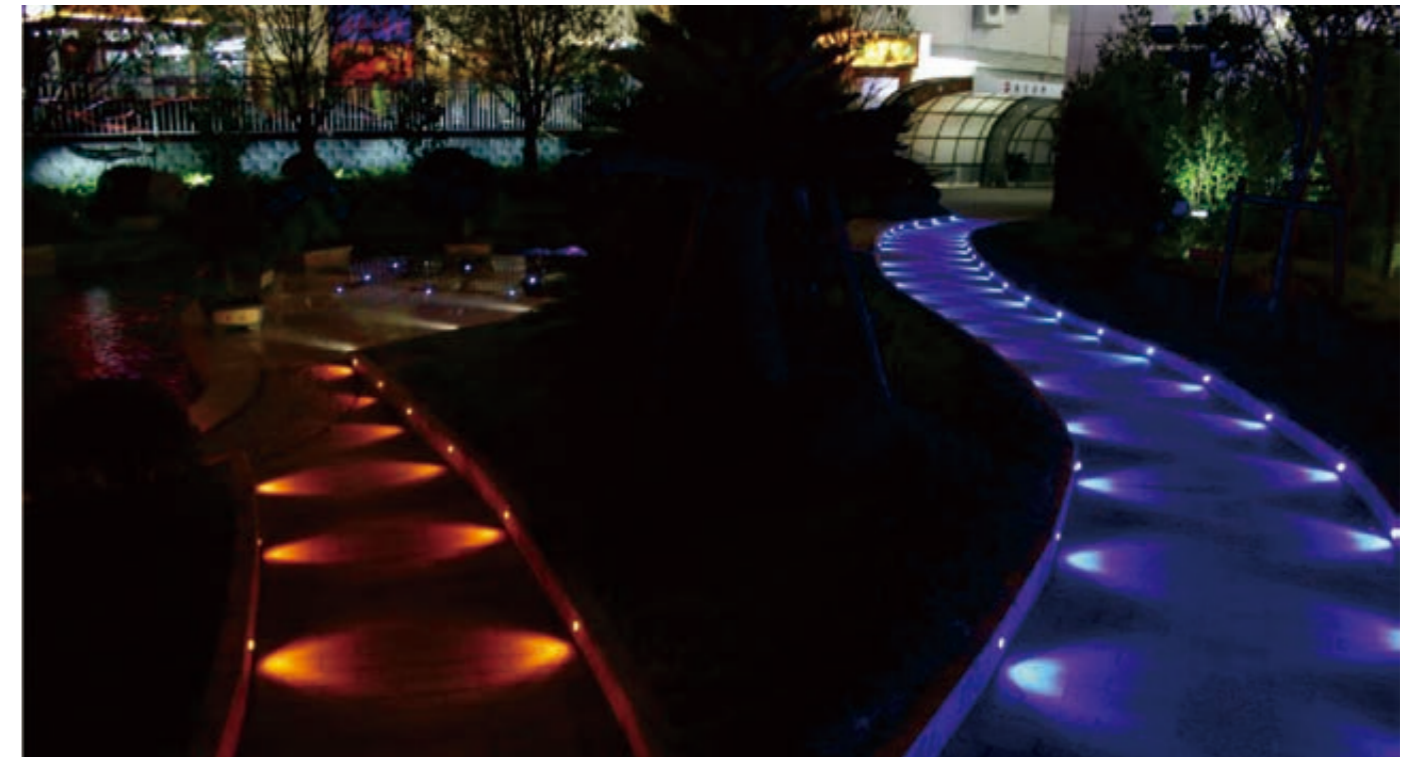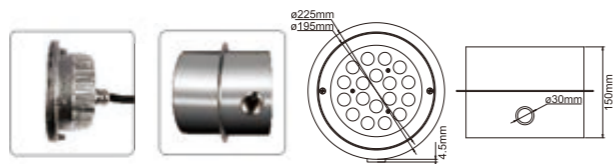


LED Inground light
LED地埋灯

Application:

Application to Green Belt, Park landscape design, Garden pedestrian street Parking area, Square night view, Bridge and building outdoor decoration, residential areas, Road lighting.



Model No.: RS-UG1W-M (88231)
Size: $\phi 28 \times H62\text{mm}$
Input Vol.: DC12V
Power: 1*1W
Color: Single color
Material: Aluminum
IP grade: IP65

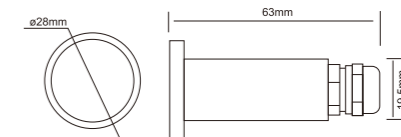




NEW




Model No.: RS-UG1W316X-N (88256)

Size: $\phi 62 \times H94$ mm
Input Vol.: AC/DC12V, AC90-240V
Power: 1*1W
Color: Single color
Material: 316L Stainless steel
IP grade: IP67

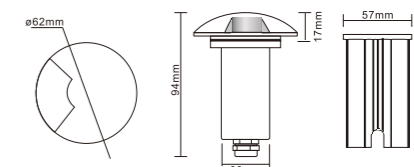

Model No.: RS-WL1W-A (88267)

Size: $\phi 110 \times H82$ mm / L110*W110*H82mm
Input Vol.: AC/DC12V, AC90-240V
Power: 1*1W
Color: Single color
Material: Stainless steel 304 + Aluminum body
IP grade: IP67

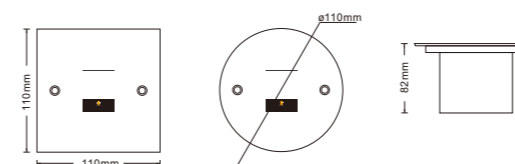


NEW




Model No.: RS-UG3W-M (88202)

(One-side light cover for optional)
Size: $\phi 62 \times H62$ mm
Input Vol.: AC/DC12V
Power: 1*3W
Color: Single color
Material: 304 Stainless steel
IP grade: IP67

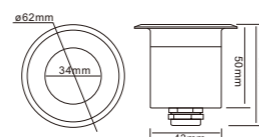

Model No.: RS-UG1W316X (88204)

Size: $\phi 52 \times H56$ mm
Input Vol.: DC12V
Power: 1*1W
Color: Single color
Material: 316 Stainless steel
IP grade: IP67

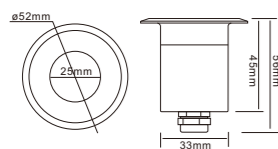

Model No.: RS-UG3W-PM (88228)

Size: $\phi 130 \times H90$ mm
Input Vol.: AC/DC12V, DC24V, AC90-240V
Power: 3*1W
Color: Single color / RGB
Material: 304 Stainless steel Cover + Aluminum body
IP grade: IP67




Model No.: RS-UG6W-PM (88229)

Size: $\phi 145 \times H90$ mm
Input Vol.: AC/DC12V,DC24V,AC90-240V
Power: 6*1W
Color: Single color / RGB
Material: 304 Stainless steel Cover + Aluminum body
IP grade: IP67



Model No.: RS-UG6W-T (88262)

Size: $\phi 130 \times H95$ mm
Input Vol.: AC/DC12V,DC24V,AC90-240V
Power: 6*1W
Color: Single color / RGB
Material: 304 Stainless steel Cover + Aluminum body
IP grade: IP67

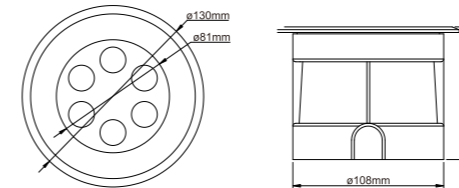


Model No.: RS-UG9W-PM (88230) RS-UG12W-PM (88230)

Size: $\phi 160 \times H90$ mm
Input Vol.: 9*1W AC/DC12-24V,AC90-240V
 12*1W AC/DC24V,AC90-240V
Power: 9*1W/12*1W
Color: Single color / RGB
Material: 304 Stainless steel Cover + Aluminum body
IP grade: IP67




Model No.: RS-UG12W-T (88263)

Size: $\phi 180 \times H120$ mm
Input Vol.: AC/DC24V,AC90-240V
Power: 12*1W
Color: Single color / RGB
Material: 304 Stainless steel Cover + Aluminum body
IP grade: IP67

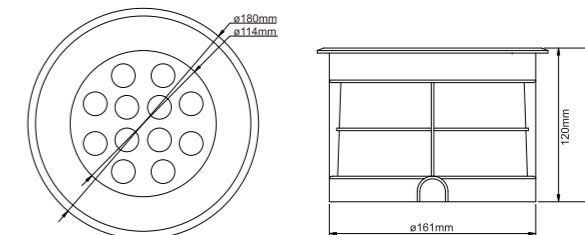


Model No.: RS-UG3W-T (88261)

Size: $\phi 100 \times H105$ mm
Input Vol.: AC/DC12V,DC24V,AC90-240V
Power: 3*1W
Color: Single color / RGB
Material: 304 Stainless steel Cover + Aluminum body
IP grade: IP67

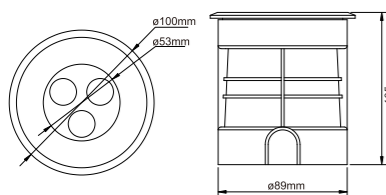


Model No.: RS-UG24W-T (88264)

Size: $\phi 260 \times H120$ mm
Input Vol.: AC/DC24V, AC90-240V
Power: 24*1W
Color: Single color / RGB
Material: 304 Stainless steel Cover + Aluminum body
IP grade: IP67

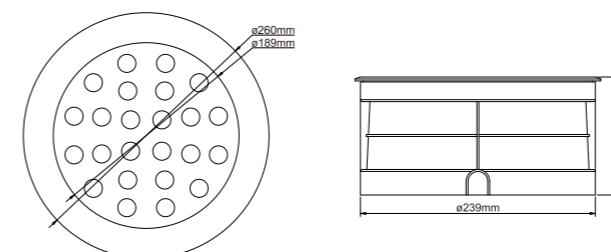


Model No.: RS-UG36W-T (88265)

Size: $\phi 320 \times H100$ mm
Input Vol.: AC/DC24V, AC90-240V
Power: 36*1W
Color: Single color / RGB
Material: 304 Stainless steel Cover + Aluminum body
IP grade: IP67

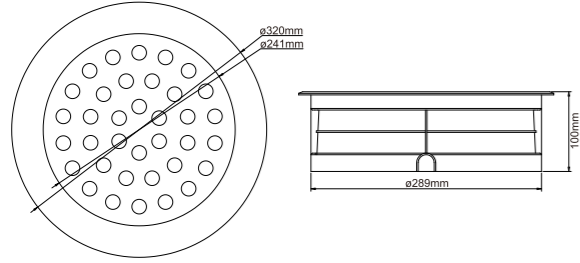


Model No.: RS-UG6W-L (88325)

Size: L230*W115*H105mm
Input Vol.: AC/DC12V, AC90-240V
Power: 36pcs SMD5050
Color: Single color / RGB
Material: 304 stainless steel+Aluminium alloy sleeve
IP grade: IP67

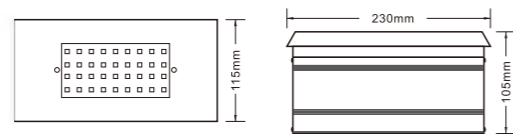

Model No.: RS-UG36W-L (88326)

Size: L1050*W115*H105mm
Input Vol.: DC24V, AC90-240V
Power: 36*1W
Color: Single color / RGB
Material: 304 stainless steel+aluminium alloy sleeve
IP grade: IP67

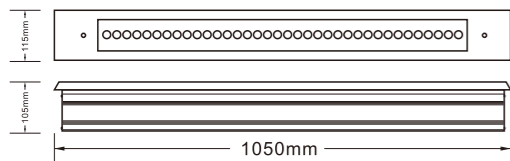

LED Wall washer light
LED洗墙灯

Application:

Apply to Building, indoor or outdoor light, Flooding for the landscape structure to outstanding building character.

Model No.: RS-WW18W-E (88336)

Size: L1000*W39*H49mm(H89mm with bracket)
Input Vol.: DC24V
Power: 48pcs/SMD5050
Color: Single color / RGB / RGBW
Material: Aluminum lamp body + tempered glass
IP grade: IP65



NEW



Model No.: RS-WW12W-BS (88336)

Size: L1000*W39*H49mm(H89mm with bracket)
Input Vol.: AC/DC24V,AC90-240V
Power: 12*1W
Color: Single color / RGB
Material: Aluminum lamp body + tempered glass
IP grade: IP65

NEW



Model No.: RS-WW24W-W (88336)

Size: L1000*W39*H49mm(H89mm with bracket)
Input Vol.: AC/DC24V,AC90-240V
Power: 24*1W
Color: Single color / RGB
Material: Aluminum lamp body + tempered glass
IP grade: IP65

Model No.: RS-WW36W-B (88304)

Size: L1000*W45*H62mm(H105mm with bracket)
Input Vol.: AC/DC24V,AC90-240V
Power: 36*1W
Color: Single color / RGB
Material: Aluminum lamp body + tempered glass
IP grade: IP65

**Model No.: RS-WW48W-B (88304)
 RS-WW54W-B (88304)**

Size: L1000*W45*H62mm(H105mm with bracket)
Input Vol.: AC/DC24V
Power: 18*3W (RGB 3in1)
 12*4W (RGBW 4in1)
Color: RGB / RGBW
Material: Aluminum lamp body + tempered glass
IP grade: IP65

**Model No.: RS-WW18W-B (88306)
 RS-WW24W-B (88306)**

Size: L1000*W45*H62mm(H105mm with bracket)
Input Vol.: AC/DC24V,AC90-240V
Power: 18*1W/24*1W
Color: Single color / RGB
Material: Aluminum lamp body + tempered glass
IP grade: IP65

**Model No.: RS-WW18W-BS (88305)
 RS-WW36W-BS (88305)**

Size: L500*W45*H62mm(H105mm with bracket)
Input Vol.: AC/DC24V,AC90-240V
Power: 18*1W (RGB)
 12*3W (RGB 3in1)
Color: Single color / RGB
Material: Aluminum lamp body + tempered glass
IP grade: IP65

**Model No.: RS-WW9W-BS (88307)
 RS-WW12W-BS (88307)**

Size: L500*W45*H62mm(H105mm with bracket)
Input Vol.: AC/DC24V,AC90-240V
Power: 9*1W/12*1W
Color: Single color / RGB
Material: Aluminum lamp body + tempered glass
IP grade: IP65



**Model No.: RS-WW72W-D (88312)
 RS-WW96W-D (88312)**

Size: L1000*W68*H80mm (H152mm with bracket)
Input Vol.: AC/DC24V,AC90-240V
Power: 24*3W/32*3W
Color: Single color / RGB / RGBW
Material: Aluminum lamp body + tempered glass
IP grade: IP65

NEW



**Model No.: RS-WW72W-DH (88312)
 RS-WW108W-D (88312)**

Size: L1000*W68*H80mm(H152mm with bracket)
Input Vol.: AC/DC24V,AC90-240V
Power: 36*2W/36*3W
Color: Single color / RGB / RGBW
Material: Aluminum lamp body + tempered glass
IP grade: IP65


NEW



**Model No.: RS-WW48W-D (88312)
 RS-WW54W-D (88312)**

Size: L1000*W68*H80mm(H152mm with bracket)
Input Vol.: AC/DC24V,AC90-240V
Power: 48*1W/54*1W
Color: Single color / RGB
Material: Aluminum lamp body + tempered glass
IP grade: IP65

NEW



Model No.: RS-WW81W-CS (88311)

Size: L500*W98*H95mm (H180mm with bracket)
Input Vol.: DC36V,AC90-240V
Power: 27*3W
Color: Single color / RGB
Material: Aluminum lamp body + tempered glass
IP grade: IP65



Model No.: RS-WW108W-CS (88311)

Size: L500*W98*H95mm (H180mm with bracket)
Input Vol.: DC36V,AC90-240V
Power: 36*3W
Color: Single color / RGBW
Material: Aluminum lamp body + tempered glass
IP grade: IP65



Model No.: RS-WW90W-C (88310)

Size: L1000*W98*H95mm(H180mm with bracket)
Input Vol.: AC90-240V
Power: 18*5W Cree
Color: 2700-6500K
Material: Aluminum lamp body + tempered glass
IP grade: IP65



Model No.: RS-WW162W-C (88310)

Size: L1000*W98*H95mm(H180mm with bracket)
Input Vol.: DC36V,AC90-240V
Power: 54*3W
Color: Single color / RGB
Material: Aluminum lamp body + tempered glass
IP grade: IP65



Model No.: RS-WW216W-C (88310)

Size: L1000*W98*H95mm(H180mm with bracket)
Input Vol.: DC36V,AC90-240V
Power: 72*3W
Color: RGBW
Material: Aluminum lamp body + tempered glass
IP grade: IP65



LED Landscape spot light LED射灯

Application:

Application to tunnels, stations, airports, shopping malls, billboards, railway stations, public areas, industrial area, indoor parking lighting.

NEW



Model No.: RS-LS3W48 (88432) RS-LS6W48 (88432)

Size: ø48*H290mm
Input Vol.: DC12-24V,AC90-240V
Power: 1*3W/1*6W
Color: Single color
Material: Aluminium+ Tempered glass cover
IP grade: IP67




NEW



**Model No.: RS-LS9W60 (88431)
RS-LS12W60 (88431)**

Size: $\phi 60 \times H320\text{mm}$
Input Vol.: AC90-240V
Power: 1*9W/1*12W
Color: Single color / RGB / RGBW
Material: Aluminium+Tempered glass cover
IP grade: IP67

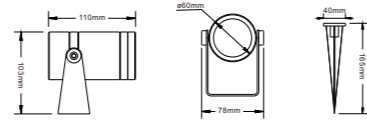


NEW




Model No.: RS-LS30W70 (88438)

Size: $\phi 70 \times H335\text{mm}$
Input Vol.: DC24V, AC90-240V
Power: 1*30W
Color: Single color / RGBW
Material: Aluminium+Tempered glass cover
IP grade: IP67

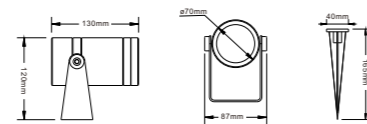


Model No.: RS-LS3W (88422)

Size: $\phi 109 \times H145\text{mm}$
Input Vol.: AC/DC12V, DC24V, AC90-240V
Power: 3*1W
Color: Single color / RGB
Material: Aluminum
IP grade: IP67




Model No.: RS-LS6W (88423)

Size: $\phi 125 \times H165\text{mm}$
Input Vol.: AC/DC12V, DC24V, AC90-240V
Power: 6*1W
Color: Single color / RGB
Material: Aluminum
IP grade: IP67




Model No.: RS-LS9W (88424)

Size: $\phi 138 \times H181\text{mm}$
Input Vol.: AC/DC12-24V, AC90-240V
Power: 9*1W
Color: Single color / RGB
Material: Aluminum
IP grade: IP67



Model No.: RS-LS12W (88425)

Size: $\phi 138 \times H181\text{mm}$
Input Vol.: AC/DC24V, AC90-240V
Power: 12*1W
Color: Single color / RGB
Material: Aluminum
IP grade: IP67





LED Garden spike light
LED地插灯


Model No.: RS-GS3W (88426)
Size: $\phi 109 \times H315\text{mm}$
Input Vol.: AC/DC12V, DC24V, AC90-240V
Power: 3*1W
Color: Single color / RGB
Material: Aluminum
IP grade: IP67

Model No.: RS-GS6W (88427)
Size: $\phi 125 \times H335\text{mm}$
Input Vol.: AC/DC12V, DC24V, AC90-240V
Power: 6*1W
Color: Single color / RGB
Material: Aluminum
IP grade: IP67




Model No.: RS-GS9W (88428)

Size: $\phi 138 \times H352\text{mm}$
Input Vol.: AC/DC12-24V, AC90-240V
Power: 9*1W
Color: Single color / RGB
Material: Aluminum
IP grade: IP67

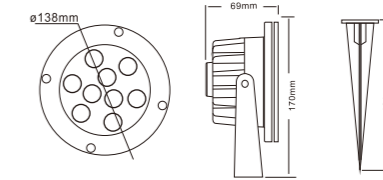


Model No.: RS-GS12W (88429)

Size: $\phi 138 \times H352\text{mm}$
Input Vol.: AC/DC24V, AC90-240V
Power: 12*1W
Color: Single color / RGB
Material: Aluminum
IP grade: IP67

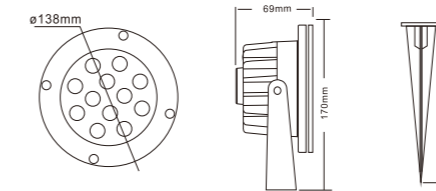

Model No.: RS-GS3WA (88426)

Size: $\phi 109 \times H364.5\text{mm}$
Input Vol.: AC12V, AC90-240V
Power: 3*2W
Color: RGB
Material: Aluminum + PC cover
IP grade: IP66



Accessories

配件



Model No.: RS-DMX500 (88612)

DMX512 Controller with SD Card
Output Signal: DMX512(1990)
Input Voltage: DC12V
Transmission speed: 250Kbps
Remote distance: 50M
DMX channels: 3 channels/4 channels
Power Consumption: <5W
Memory: Depend on SD card
Connection Terminals: XLR,RJ45
Size: L185*W120*H52mm



Model No.: RS-DSA-01 (88606)

DMX512 Signal Amplifier
Input Voltage: AC/DC12-24V
Input Signal: 1 way DMX512
Output Signal: 1 way DMX512
IP grade: IP20
Size: L72*W66*H28mm



Model No.: RS-DSA-01P (88607)

DMX512 Signal Amplifier
Input Voltage: AC/DC12-24V
Input Signal: 1 way DMX512
Output Signal: 1 way DMX512
IP grade: IP68
Size: L100*W60*H30mm



Model No.: RS-DSP-8 (88616)

8 Way DMX512 Signal Amplifier with ISOLATOR and Power Splitter
Input Signal: DMX512
Output Signal: 8 way DMX512 Signal Amplifier with Isolator
Input Voltage: AC/DC12-24V
Output Voltage: 8 way AC/DC12-24V
Connection Terminals: Green Terminals
Size: L165*W55*H40mm



Model No.: RS-DCC-03 (88608)

DMX512 Constant Current Decoder
Output Signal: DMX512(1990)
Input Voltage: DC12-24V
Output current: 300-700mA*3CH
DMX channels: 3 channels
Output Gray Scale: 256 Levels
IP grade: IP20
Size: L81*W73*H29mm



Model No.: RS-DSC-24 (88605)

2.4G Wireless DMX512 Signal Converter
Input Voltage: AC/DC12-24V
Input Signal: DMX512(as signal emitter)
Output Signal: DMX512 (as signal receiver)
Connection Terminals: XLR/Green Terminals
Working Frequency section: 2.4GHz ISM band 126 channels frequency section
Receiver Sensitive: -106dbm
Communication Distance: 100m
Size: L110*W76*H48mm



Model No.: RS-DCC-04 (88613)

DMX512 Constant Current Decoder
Output Signal: DMX512(1990)
Input Voltage: DC12-24V
Output current: 300-700mA*4CH
DMX channels: 4 channels
Output Gray Scale: 256 Levels
IP grade: IP20
Size: L81*W73*H29mm



Model No.: RS-DCV-03 (88609)

DMX512 Constant Voltage Decoder
Output Signal: DMX512(1990)
Input Voltage: DC12-24V
Output current: 4A*3CH
DMX channels: 3 channels
Power (Max): 144W/288W(12-24V)
Output Gray Scale: 256 Levels
IP grade: IP20
Size: L81*W73*H29mm



Model No.: RS-DAE-02 (88611)

DMX512 Address Editor
 DMX512 writer / DMX512 coder
Output signal: DMX512
Input Vol.: DC12V
Function: To set DMX512 address/channels for lamps before installation
Size: L100*W68*H40mm

NEW



Model No.: RS-JB140 (88713)

Stainless steel Junction box
Housing material: 316L Stainless steel
Cover: Tempered glass & 316L Panel
Optional hole position: 9pcs(Max.)
Size: L140*W140*H84mm
IP Grade: IP68

NEW



Model No.: RS-JB03 (88710)

Plastic Junction box
Housing material: ABS
Size: L84*W56*H60mm
IP Grade: IP68

